



+1 (920) 234 5113

+852 2635 2285

+52 (55) 55 74 20 76

+86 147 154 84260

email: info@gseint.com

web: www.gseint.com



Twin Headed Rocking Piston

ZW500 3rd Gen

Open Flow **3.35cfm (95lpm)**

Max. Pressure (INT.) **116psi (8bar)**


Max. Vacuum **26.6"Hg (-900mbar)**

- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Long-life cup design
- Thin wall cylinder for good heat transfer
- Stainless steel valves
- Capacitor as standard
- Field service ability
- Recoverable thermally protected motor
- Back pressure restart option
- Other voltage and configuration available upon request

Specifications

Model	ZW500A-40/7D	ZW500D2-40/7D-(3)	ZW500A-30/7YA-(3)	ZW500D2-30/7Y-(3)
Rated Voltage	220V/50Hz	115V/60Hz	220V/50Hz	115V/60Hz
Rated Input Power	570W	600W	540W	650W
Input Current	2.8A	5.7A	2.7A	5.7A
Air Flow at rated Pressure	38LPM@7bar	42LPM@7bar	31LPM@6bar	38LPM@6bar
Max. Continuous Pressure	7bar	7bar	7bar	7bar
Max. Intermitt Pressure	8bar	8bar	8bar	8bar
Noise Level	64.5dBA	68.5dBA	64dBA	68dBA
Restart Pressure	0Kpa	0Kpa	350Kpa	350Kpa
Ambinet Temperature	0-40°C	0-40°C	0-40°C	0-40°C
Insulation Class	B	B	B	B
Insulation Resistance	> 500M ohm	> 500M ohm	> 500M ohm	> 500M ohm
Thermal Protect	145±5°C	145±5°C	145±5°C	145±5°C
Capacitor Included	8µF	30µF	8µF	36µF
Weight	7.5kg	7.5kg	7.5kg	7.5kg

Performance Chart

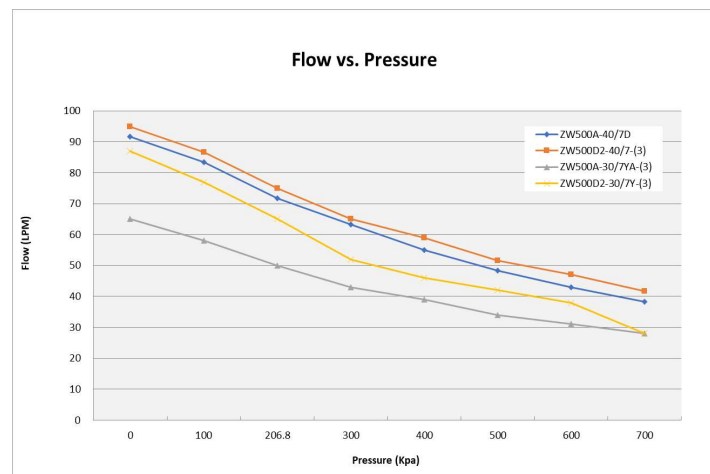

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

