



+1 (920) 234 5113   
 +852 2635 2285   
 +52 1 (442) 343 3172   
 +86 147 154 84260   
 email: [info@gseint.com](mailto:info@gseint.com)  
 web: [www.gseint.com](http://www.gseint.com)



## Twin Headed Rocking Piston

ZW700 A Series

Open Flow **4.2cfm (120lpm)**  
 Max. Pressure (INT.) **116psi (8bar)**  
 Max. Vacuum **26"Hg (-880mbar)**


- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Long-life cup design
- Thin wall cylinder for good heat transfer
- Stainless steel valves
- Capacitor as standard
- Field service ability
- Recoverable thermally protected motor
- Back pressure restart option
- Other voltage and configuration available upon request

### Specifications

Model	ZW700A-60/7-(3)	ZW700B2-60/7-(3)	ZW700D2-45/7Y-(3)
Rated Voltage	220V/50Hz	110V/60Hz	115V/60Hz
Rated Input Power	820W	850W	850W
Input Current	3.8A	7.9A	7.9A
Air Flow at rated Pressure	60LPM@7bar	60LPM@7bar	43LPM@7bar
Max. Continuous Pressure	7bar	7bar	7bar
Max. Intermitt Pressure	8bar	8bar	8bar
Noise Level	71dBA	72dBA	72dBA
Restart Pressure	0Kpa	0Kpa	700Kpa
Ambinet Temperature	10-40°C	10-40°C	10-40°C
Insulation Class	B	B	B
Insulation Resistance	> 500M ohm	> 500M ohm	> 500M ohm
Thermal Protect	145±5°C	145±5°C	145±5°C
Capacitor Included	25µF	80µF	80µF
Weight	9.7kg	9.6kg	9.6kg

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

### Performance Chart

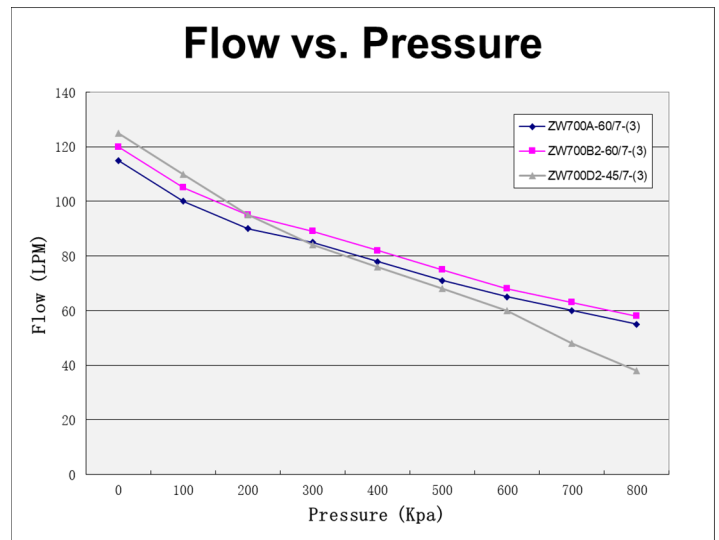

### Technical Drawings

