

## Portable Single-Headed Rocking Piston

ZWS30Z12

Open Flow 0.6 cfm (16.9 lpm)


Max. Pressure (INT.) 29 psi (2 bar)

- Permanently lubricated bearings
- Stainless steel, non-lubricated cup and cylinder design for multi-application
- BLDC motor with external control board
- Long-life cup design
- Extra cooling is necessary for continuous operation

### Specifications

Model	ZWS30Z12-11.3/1.6
Rated Voltage	12VDC
Voltage Range	11-15VDC
Max. Input Power	59W
Max. Input Current	4.5A
Air Flow at rated Pressure	11.3LPM@1.6bar
Max. Continuous Pressure	1.6bar
Max. Intermitt Pressure	2bar
Noise Level	50dBA
Ambient Temperature	10-40°C
Insulation Class	F
Voltage Protect	<10V, >16V
Current Protect	9A
Motor	BLDC
Weight	650g

### Performance Chart

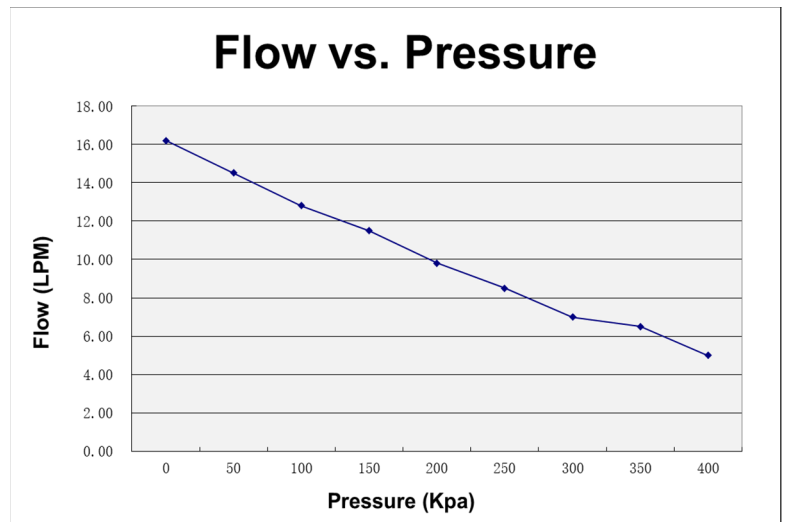

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

### Technical Drawings

