


## Twin-Headed Rocking Piston

ZW280N

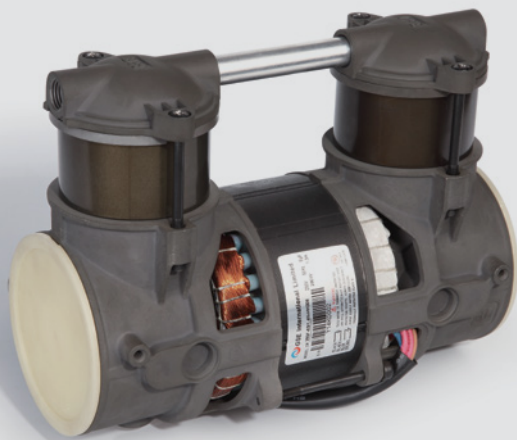

Max. Flow **2.93 cfm (83 lpm)**

Max. Pressure **36.3 psi (2.5 bar)**


Max. Vacuum **25.4"Hg (-860 mbar)**

- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Long-life cup design
- Low noise level (57 dBA)
- Stainless-steel valves
- Capacitor as standard
- Recoverable thermally protected motor

### Specification

Model Number	ZW280H2-76/1.4N	ZW280F-63/1.4N
Open Flow	2.93 cfm (83 lpm)	2.47 cfm (70 lpm)
Max. Continuous Pressure	36.3 psi (2.5bar)	36.3 psi (2.5 bar)
Max. Continuous Vacuum	25.4"Hg (-860 mbar)	25.4"Hg (-860 mbar)
Current At Rated Load	2.9A	2.9A
Power At Rated Load	330W	280W
Motor Type	PSC	PSC
Voltage/Frequency	120V/60Hz	230V/50Hz
Starting Current	4.5A	4.5A
Net Weight	9.7 lbs (4.4kg)	9.7 lbs (4.4kg)

### Performance Chart

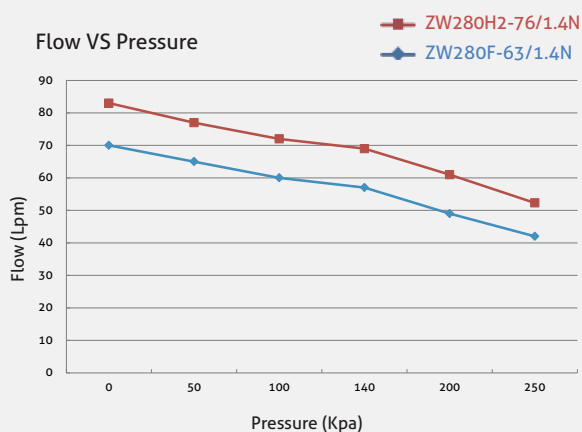

*The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.*

### Technical Drawings

