

Twin-Headed Rocking Piston

ZW400


Max. Flow **4.8 cfm (135 lpm)**
 Max. Pressure **30 psi (2.1 bar)**
 Max. Vacuum **27"Hg (-910 mbar)**

- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Long-life cup design
- Thin wall cylinder for good heat transfer
- Stainless-steel valves
- Capacitor as standard
- Field service ability
- Recoverable thermally protected motor
- Other voltages and configurations available upon request

Specification

Model Number	ZW400D2-115/1.4	ZW400A-90/2-(3)
Open Flow	4.8 cfm (135 lpm)	4 cfm (113 lpm)
Max. Continuous Pressure	30 psi (2.1 bar)	36psi (2.5 bar)
Max. Continuous Vacuum	27"Hg (-910 mbar)	24.8"Hg (-840 mbar)
Current At Rated Load	6.1A	2.55A
Power At Rated Load	620W	510W
Motor Type	PSC	PSC
Voltage/Frequency	115V/60Hz	220V/50Hz
Starting Current	19A	7A
Net Weight	16.5 lbs (7.1kg)	14.3 lbs (6.5kg)

Performance Chart

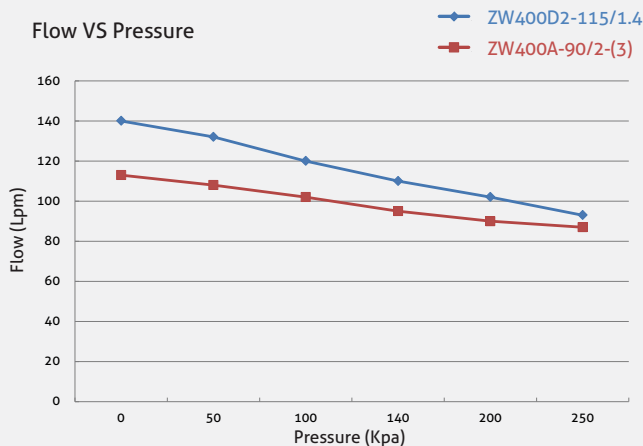

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

