

Portable Twin-Headed Rocking Piston

ZW50Z



Max. Flow **0.54 cfm (15.5 lpm)**


Max. Pressure **18.8 psi (1.3 bar)**

- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Compact but powerful
- BLDC motor with external control board
- Long life design
- Continuous operation
- Designed for portable oxygen concentrator
- With flexibility for all DC portable device

Specification

Model Number	ZW50Z12-12/1.26
Open Flow	0.54 cfm (15.5 lpm)
Max. Continuous Pressure	18.8 psi (1.3 bar)
Max. Continuous Vacuum	N/A
Current At Rated Load	4.8A
Power At Rated Load	58W
Motor Type	BLDC
Voltage Range	10-14VDC
Starting Current	1.3A
Net Weight	0.82 lbs (0.37kg)

Performance Chart

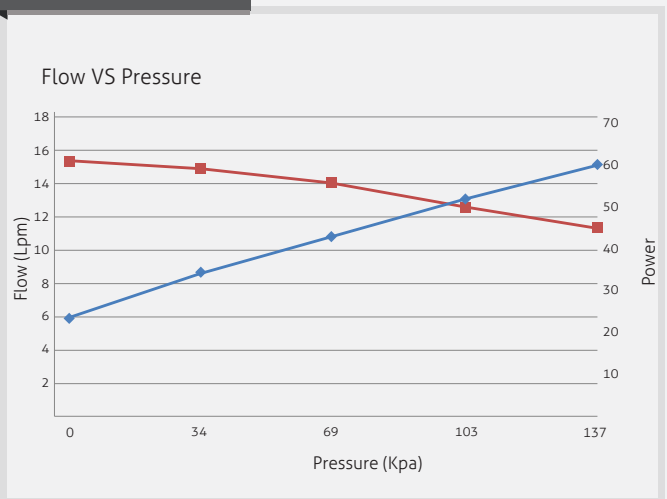

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

