

## Twin Headed Rocking Piston


**ZWS170**  
 Open Flow **0.32cfm (10lpm)**  
 Max. Pressure (INT.) **30psi (2bar)**

- Oil-less, non-lubricated cup and cylinder
- Highly reliable
- Field service ability
- Thermally protected motor
- Other voltage and configuration available upon request

### Specifications

Model	ZWS170A-6.7/0.8	ZWS170D2-6.7/0.8
Rated Voltage	220V/50Hz	115V/60Hz
Rated Input Power	75W@0.8bar	70W@1.1bar
Input Current	0.8A@0.8bar	1.3A@1.1bar
Air Flow at rated Pressure	7LPM	5.5LPM
Max. Continuous Pressure	1.5bar	1.5bar
Max. Intermit Pressure	2bar	2bar
Noise Level	62dBA	69dBA
Restart Pressure	0Kpa	0Kpa
Ambinet Temperature	10-40°C	0-40°C
Insulation Class	B	B
Thermal Protect	130°C	130°C
Weight	1.1kg	1.1kg

### Performance Chart

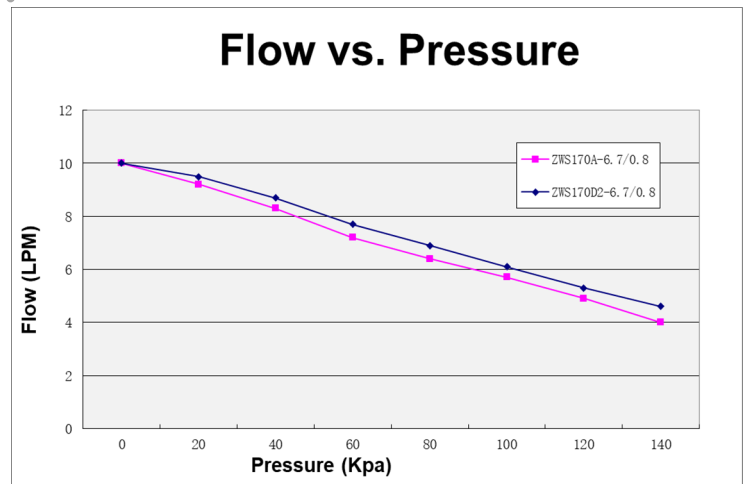

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

### Technical Drawings

