

Single Headed Rocking Piston

ZWS170

Open Flow **10lpm (0.35cfm)**


Max. Pressure (INT.) **2bar (29psi)**

- Oil-less, non-lubricated cup and cylinder
- Highly reliable
- Field service ability
- Thermally protected motor
- Other voltage and configuration available upon request

Specifications

Model	ZWS170A-6.7/0.8	ZWS170D2-6.7/0.8
Rated Voltage	220V/50Hz	115V/60Hz
Rated Input Power	75W@0.8bar (0.1HP@11.6psi)	70W@1.1bar (0.1HP@16psi)
Input Current	0.8A@0.8bar (0.8A@11.6psi)	1.3A@1.1bar (1.3A@16psi)
Air Flow at rated Pressure	7LPM (0.25CFM)	5.5LPM (0.19CFM)
Max. Continuous Pressure	1.5bar (22psi)	1.5bar (22psi)
Max. Intermit Pressure	2bar (29psi)	2bar (29psi)
Noise Level	62dBA	69dBA
Restart Pressure	0Kpa (0psi)	0Kpa (0psi)
Ambinet Temperature	10-40°C(50-104°F)	10-40°C(50-104°F)
Insulation Class	B	B
Thermal Protect	130°C (266°F)	130°C (266°F)
Weight	1.1kg (2.4lbs)	1.1kg (2.4lbs)

Performance Chart

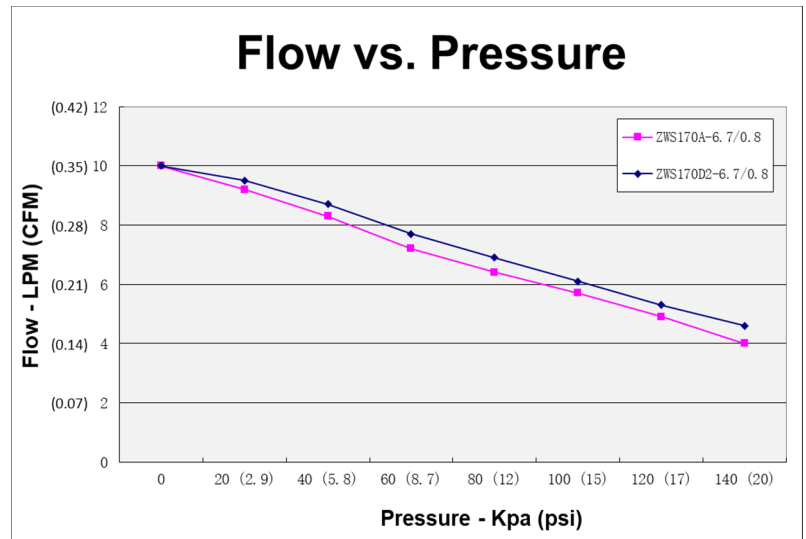

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

