



Twin Headed Vacuum Pump

ZW370V/S


Open Flow **50lpm (1.77cfm)**
 Max. Vacuum **-980mbar (28.9"Hg)**

- Long-life invert piston cup special design for vacuum application
- Permanently lubricated bearings
- Oil-less, non-lubricated cup and cylinder
- Long-life cup design
- Thin wall cylinder for good heat transfer
- Stainless steel valves
- Capacitor as standard
- Field service ability
- Recoverable thermally protected motor
- Other voltage and configuration available upon request

Specifications

Model	ZW370AV-47/-0.98	ZW370B2V-50/-0.98
Rated Voltage	220V/50Hz	110V/60Hz
Input Power (Open Flow)	300W (0.40HP)	280W (0.38HP)
Input Current (Open Flow)	1.4A	2.5A
Open Flow	47LPM (1.66CFM)	50LPM (1.77CFM)
Max. Continuous Vacuum	-98Kpa (28.9"Hg)	-98Kpa (28.9"Hg)
Max. Intermit Pressure	N/A	N/A
Noise Level	62dBA	63dBA
Restart Vacuum	0Kpa	0Kpa
Ambinet Temperature	5-40°C (41-104°F)	5-40°C (41-104°F)
Insulation Class	B	B
Insulation Resistance	> 500M ohm	> 500M ohm
Thermal Protect	135±5°C (275±9°F)	135±5°C (275±9°F)
Capacitor Included	22.5µF	22.5µF
Weight	7.8kg (17.7lbs)	7.8kg (17.7lbs)

Performance Chart

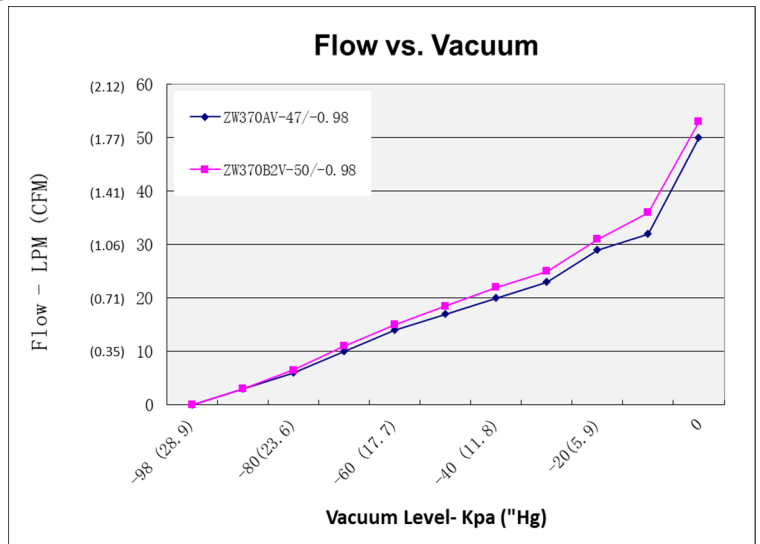

The information presented in this material is based on technical data and test results of nominal units. Its is believed to be accurate and reliable and is offered as an aid to help in the selection of GSE products. It is the responsibility of the user to determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith. GSE does not warrant, guarantee or assume any obligation or liability in connection with this information.

Technical Drawings

